

# PowerCat 6 LS0H Locking Patch Cords



## The Molex PowerCat 6 Locking Patch Cords complement the PowerCat 6 end-to-end solution.

The Molex PowerCat 6 Patch Cords are designed to support high-speed networks including 10/100BASE-T and 1000BASE-T. The patch cables are equipped with RJ45 connectors protected by a locking mechanism. Once the patch cord is connected, it cannot be removed without the use of the specially designed key. This solution prevents unauthorized changes in patch cable connections within the telecommunication outlet zone or patching zone. It also allows for the protection of strategic connections within the system.

The patch cable is made from high quality four pair U/UTP 24 AWG stranded copper wire available in white, black, blue, gray, green, yellow, orange, purple, red and pink. Lengths offered from 1m-20m.

Please note that the patch cords are supplied with one key per pack of 10.

Please note this product is not for sale in USA, China and Taiwan.

## Features and Advantages

Patch cords are equipped with RJ45 connectors protected by a lock

4 pair 24 AWG U/UTP cord with LS0H outer sheath

Slim clear anti-snap slip on boots

568B wiring

RoHS compliant



## Specifications

### COMMERCIAL STANDARDS

ISO/IEC 11801 2nd Ed Amd.1 Class EA,  
IEC 60332-1, IEC 61034-2, IEC-60754-1,  
TIA-568.2-D

### ENVIRONMENTAL STANDARDS

RoHS compliant

### MECHANICAL

Cable  
Conductor size: 24 AWG stranded copper wire  
Screen material of pair: Aluminum/polyester shield  
Screen material of cable: Braid made of 0,08mm wires  
Nom. O.D.: 6.1mm max  
Sheath: Low Smoke Zero Halogen (IEC 60332-1)  
Bend radius: 8X O.D.  
Operating temperature range: -25°C to +55°C

Plug  
Operating life: Minimum 750 insertion cycles  
RJ45 plug material: Clear polycarbonate (PC)  
Boot material: Clear polyvinylchloride (PVC)  
Contact material: 0.35mm thick copper  
Contact plating: 1.27um gold  
RJ45 plug dimensions compliant with: ISO/IEC 60603-7 and FCC 47 Part 68

### ELECTRICAL

Max voltage: 150 VAC (max)  
Max current: 1.5A @ 25°C

[www.molexces.com](http://www.molexces.com)

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners. This information is correct at the time of publication, specifications are subject to change.


# PowerCat 6 LS0H Locking Patch Cords



## Ordering Information

Part No. Matrix - Substitute the correct code number or letter to determine the assembly construction

**PCD - 029XX - XX**

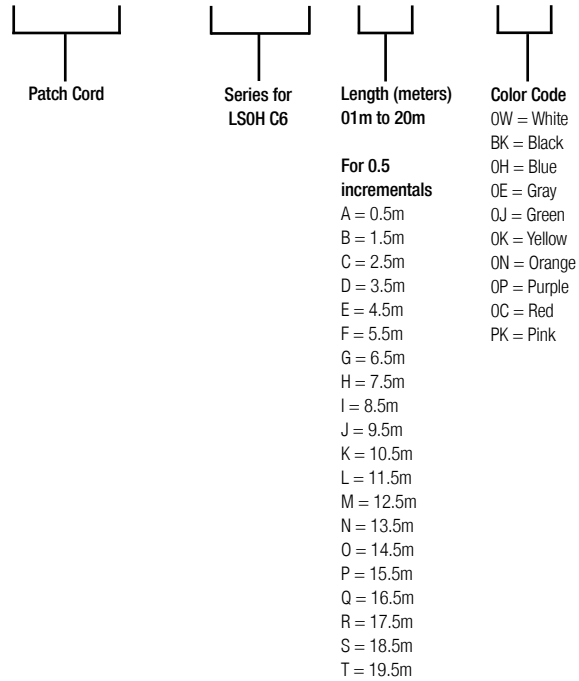

For example: To order a Locking Patch Cord PowerCat 6 U/UTP LS0H 1m length in Black, the part number would be PCD-02901-BK

\*\*\*Standard stocked color: OH = Blue. All colors and lengths may be subject to availability, MOQs and variable pricing. \*\*\*

Order No.	SAP No.	Description
C6 CORD-KEY-BLUE	180190015	Set of 5 Key Kit for Locking Patch Cords - Blue

# Centex

Technology, Innovation and Solutions

Centex Knutsen Norge AS  
Olaf Helsets vei 5A, 0694 Oslo  
Tlf: 23039100 E-post: [tilbud@centex.no](mailto:tilbud@centex.no)

[www.molexces.com](http://www.molexces.com)

Molex is a registered trademark of Molex, LLC in the United States of America and may be registered in other countries; all other trademarks listed herein belong to their respective owners. This information is correct at the time of publication, specifications are subject to change.